QUICK INSTALLATION GUIDE v1.0

TOWERRAID TR5M6G

5 BAY SATA 6G TO eSATA 6G (PORT MULTIPLIER)

SANS DIGITAL®

Package Contents

Item	Quantity
TR5M6G	1
Removable Tray	5
Power cord	1
eSATA cable	1
2 Port eSATA PCIe Adaptor	1
Screws	1 set
Quick Installation Guide	1
CD Manual	1

Please contact Sans Digital for missing or damaged items.

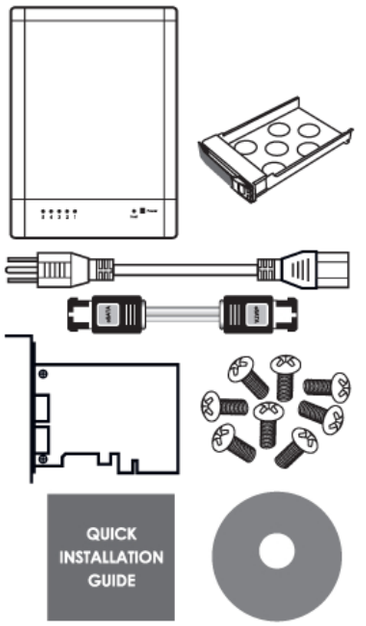

LED Indicators

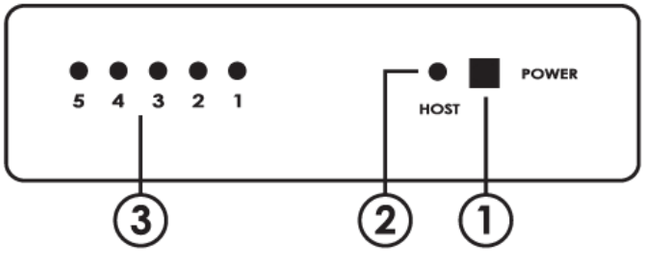

1. **Power LED** - Lights when unit is powered on.
2. **PC Link LED** - Green: the unit is connected to computer.
   Blinking Green: HDD is being accessed.
3. **HDD LEDs** - Green: HDD is installed.
   Blinking Green: HDD is being accessed.

Hard Drive Installation

1. Open the front hard drive panel of the unit.
2. Remove the hard drive trays by pushing the tray tab to the right and releasing the tray handle.

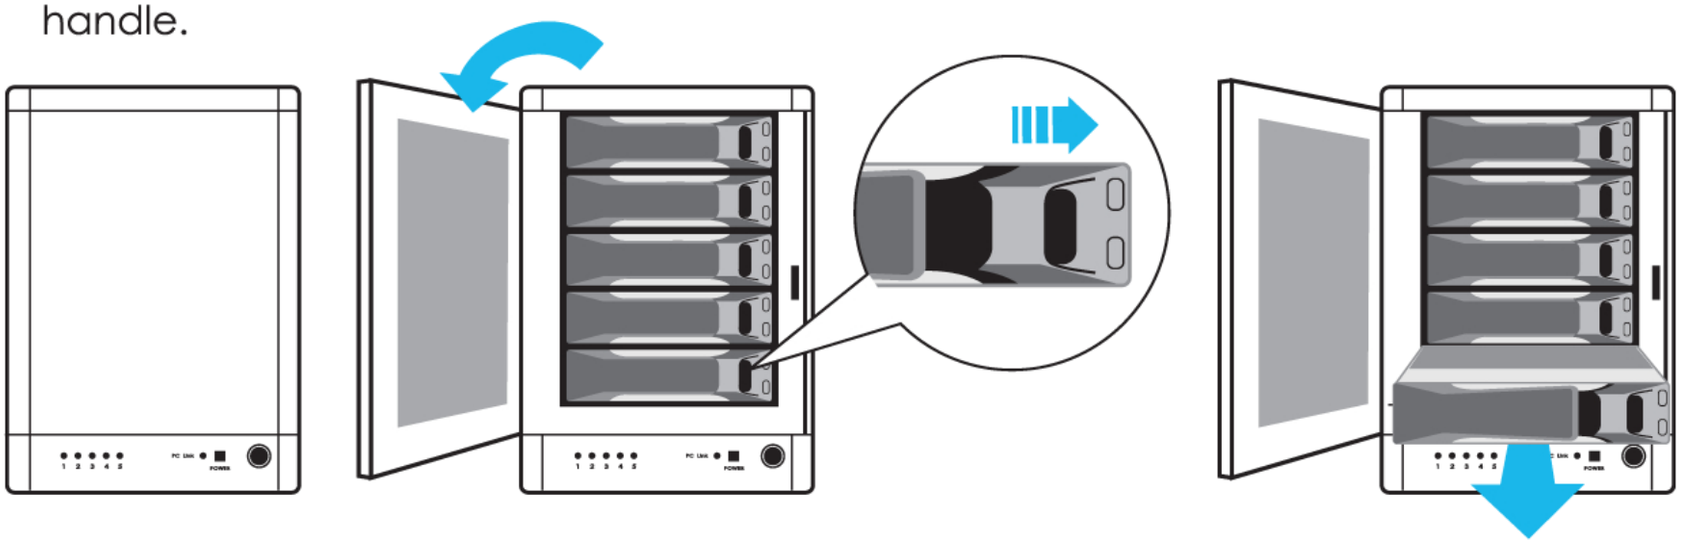

Hard Drive Installation (Continued)

3. Install each hard drive by placing them into the hard drive trays and securing them on both sides with the included screws.
4. Place the trays back into the unit and lock them in place by pushing the tray handles in.
5. Close the front hard drive panel.

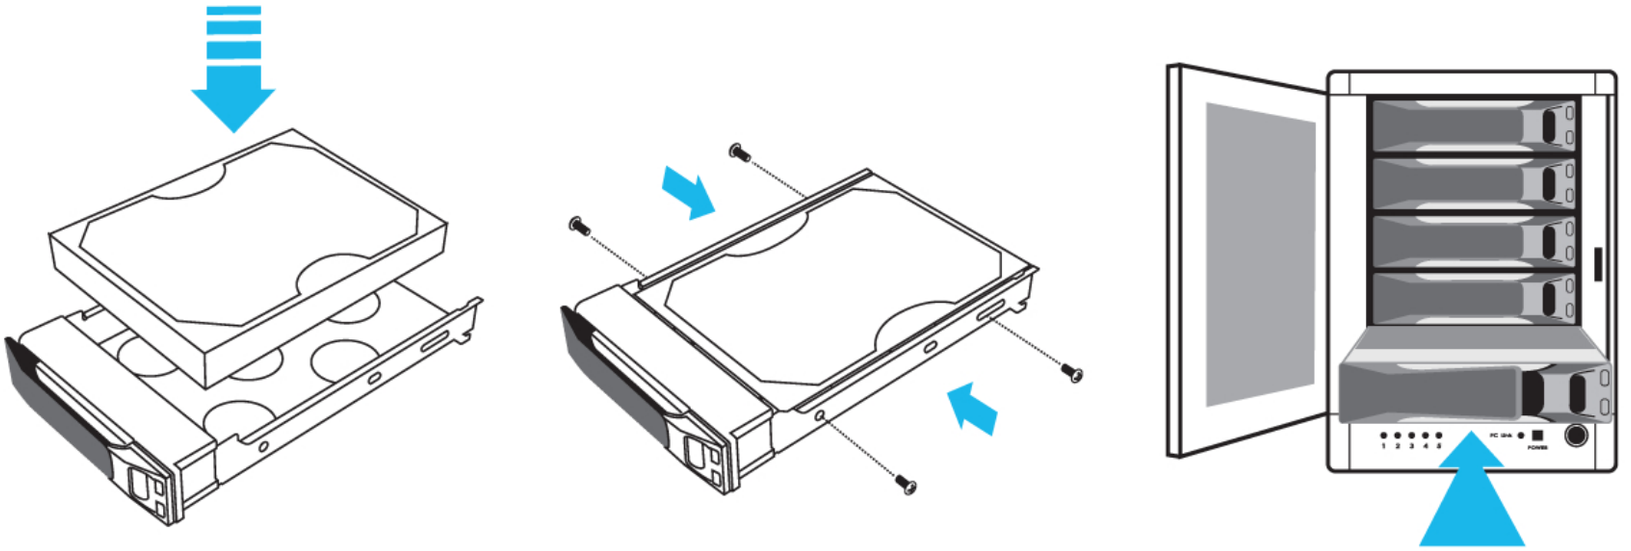

Connection Diagram

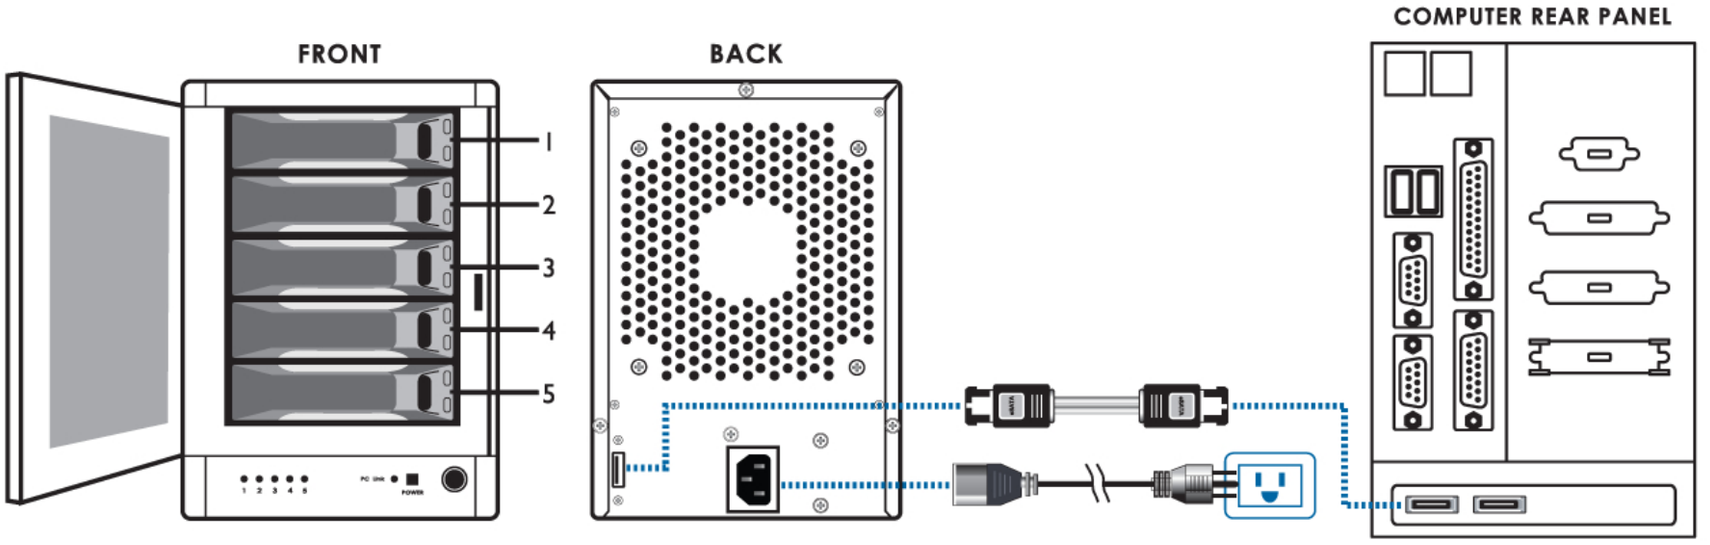

Power ON/OFF: Push the power button located on the front panel to power on/off the unit.

Installing the PCIe Adapter Card to a Computer

Unplug AC power from computer before installation.

Insert the PCIe Card into an available PCIe slot (x4 / x8 / x16) on your computer (Step 1) and secure with screw (Step 2). Both PCIe 1.0 & 2.0 are compatible, where 2.0 provides optimal performance.

Note: Please refer to CD for driver installation.

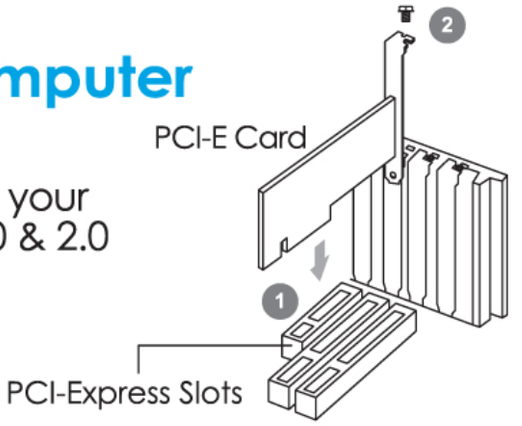

Windows System Installation

Step 1

From Windows Explorer, point the cursor at "Computer", right click and select "Manage".

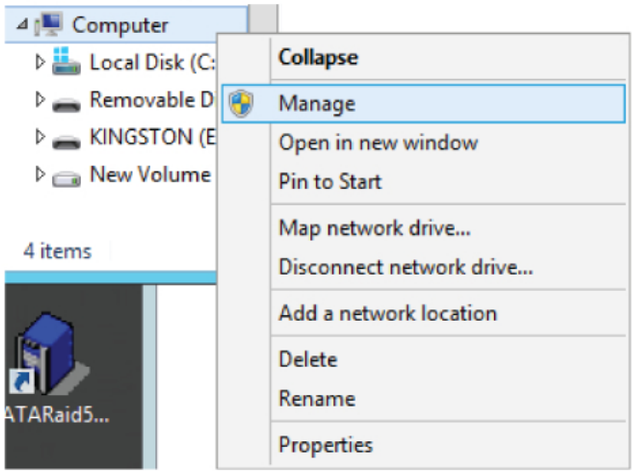

Step 2

Click on Device Manager -> Storage controllers -> Right Click on Rocket RAID SATA controller -> "Update Driver Software"

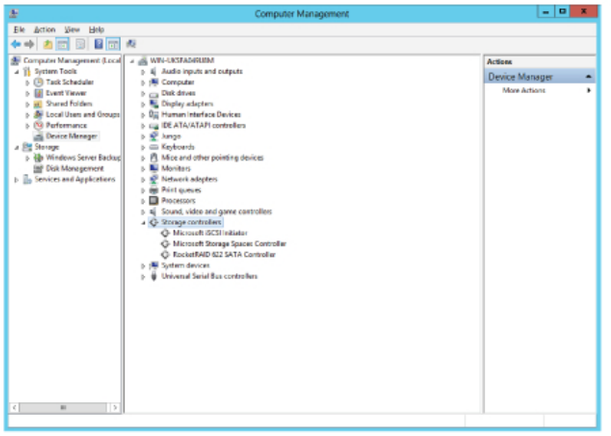

Step 3

Select the driver update and begin installation process. Make sure to use "Browse My Computer for Driver Software" and use the driver files on CD.

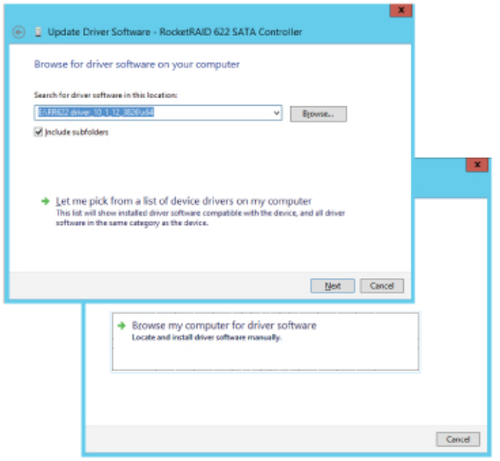

Step 4

After SATA card installation is completed, click close and reboot. **Note: Please also install "Highpoint WebRAID management software" located in the CD-ROM:\WebGUI_Management Folder.**

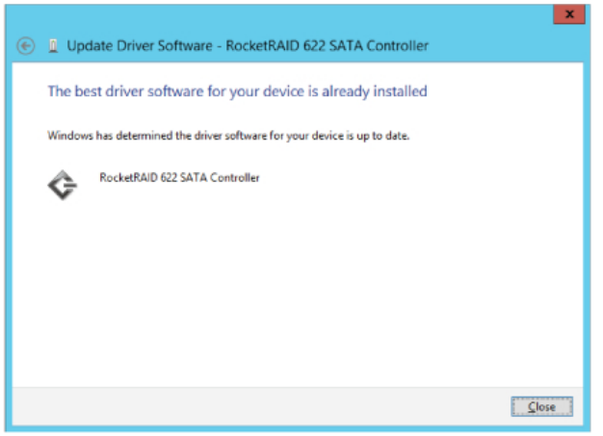

MAC System Installation

Step 1

Open the included CD-ROM:\RAID Driver\ MAC, open up the package.

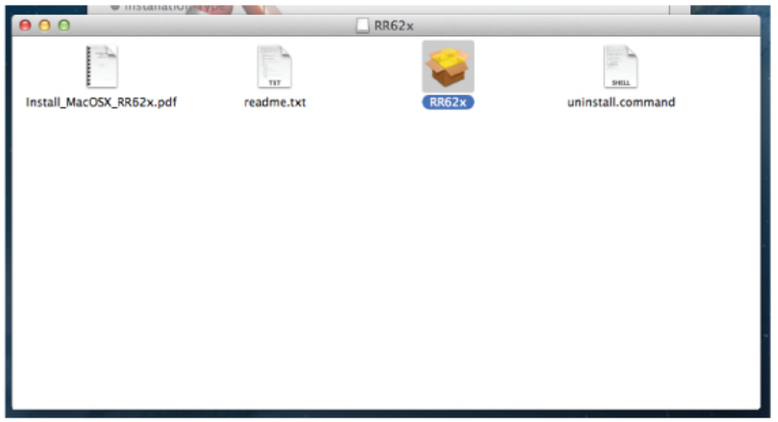

Step 2

Follow the on-screen instruction for installation. Select "Continue"

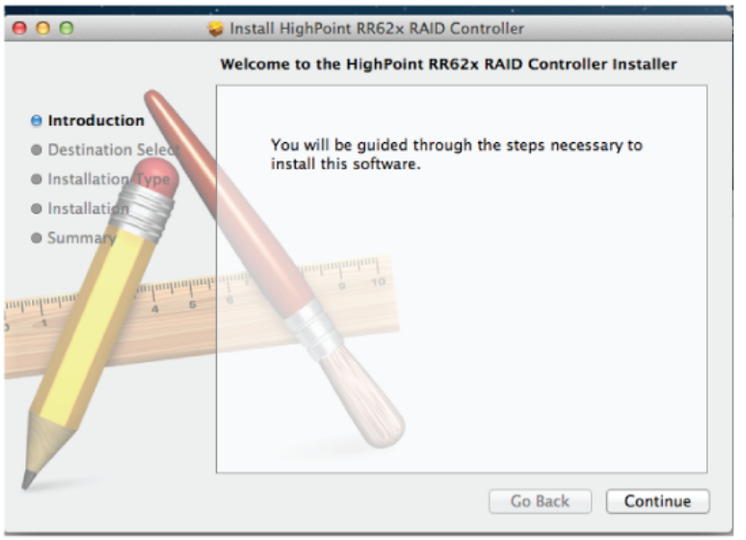

Step 3

Select both drivers and "Highpoint Web RAID Management", and select "Continue"

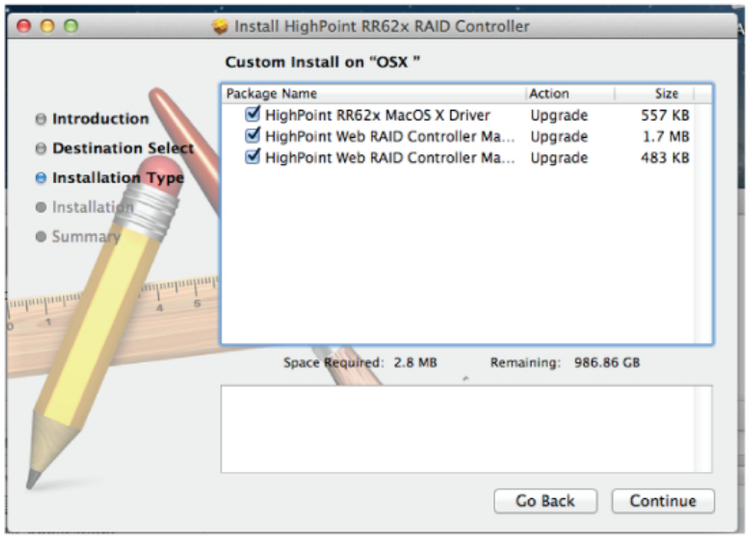

Step 4

After installation, select "Restart" to reboot your Mac Computer.

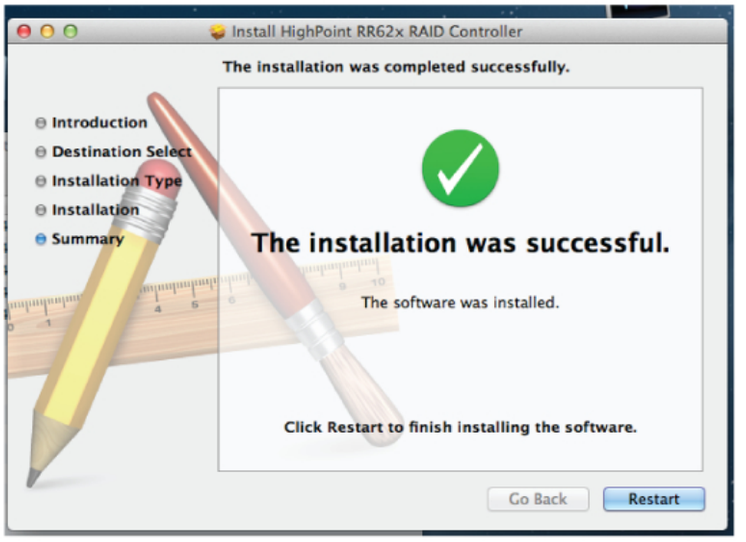

Note:

Default Setting for Highpoint Web Management

- **http://localhost:7402/ or https://localhost:7402/**
- **Username: RAID (case sensitive)**
- **Password: hpt (case sensitive)**

RAID Mode Setup and Diagrams

To setup RAID mode, please insert the included CD into the computer and install the Web GUI. Follow the installation instructions in the Detailed Manual to fully setup the desired RAID mode.

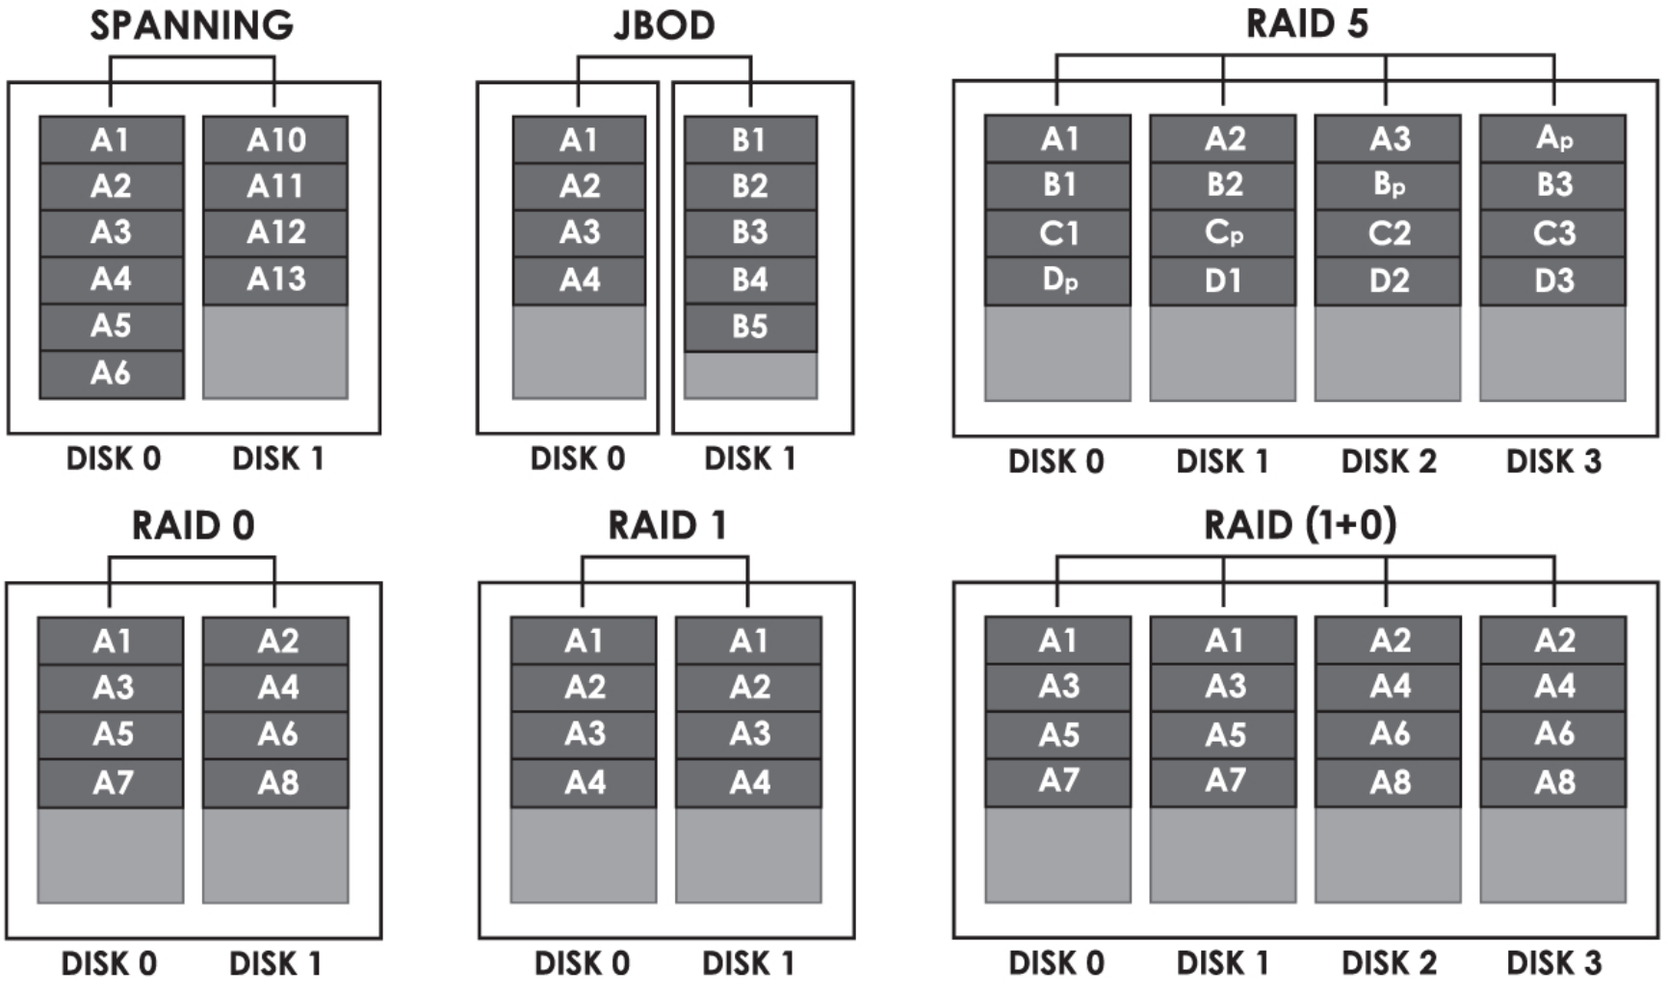

*** RAID system should not be use as a substitute for your data backups. A data backup strategy should be implemented to fully protect your data assets.**