

MS2UT Firmware Update Instructions

****WARNING**** Read Before Upgrading Firmware.


Please follow the update instructions carefully. Failure to follow the instructions may interrupt the update process and may cause the player to be unresponsive or to require repair.

Do not power off the player or disconnect it from the AC power outlet. Loss of power during the installation of the firmware update may cause the unit to be unresponsive and require repair.

It is highly recommend to back up your data before firmware update procedure.


It is highly recommended to print out these instructions as a reference during the installation process.

1. Connect MS2UT to the serial port of your computer by RS232 cable.
2. Open the RAIDGuide Manager software.

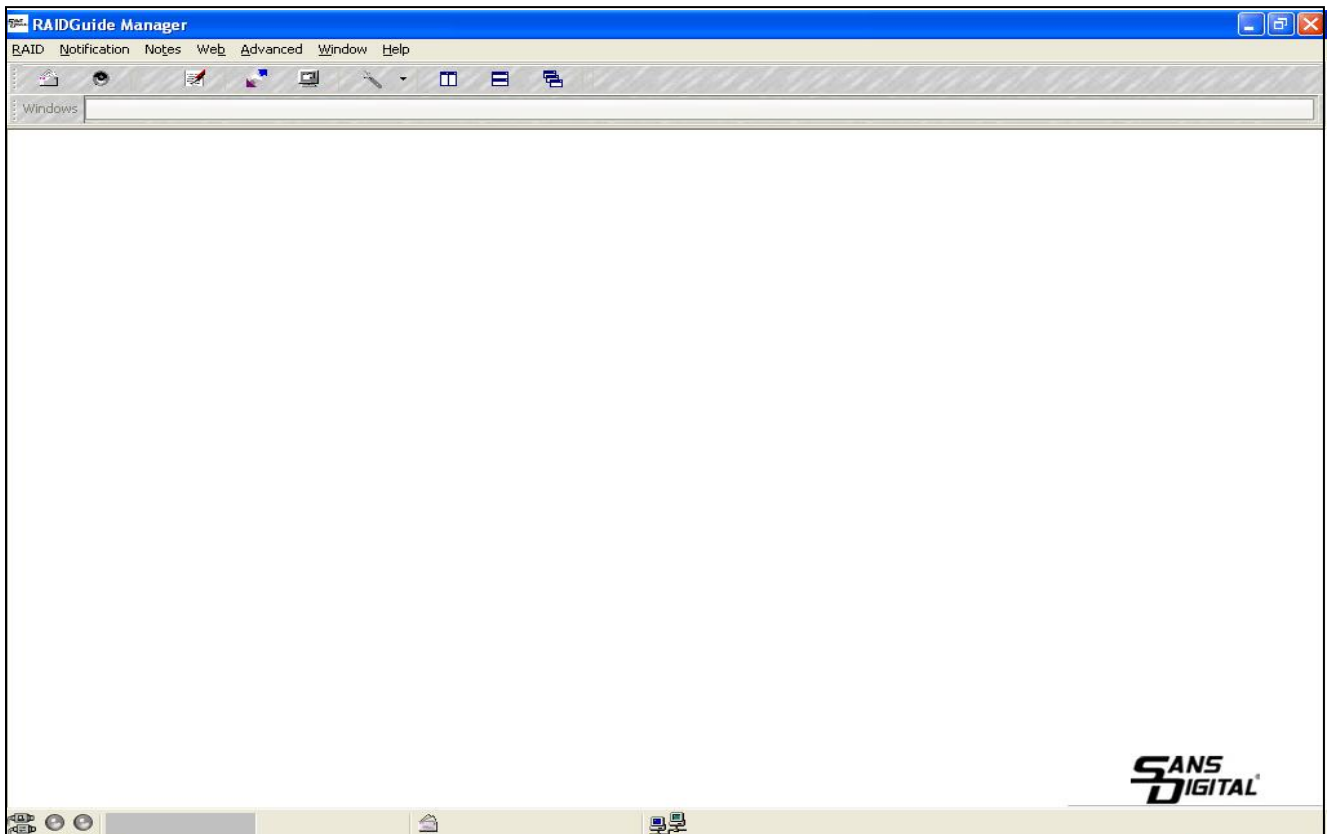


Your ONE-STOP Storage Solution Provider
www.sansdigital.com

3. Click "RAID" -> "Connect" -> "RAID System 1"

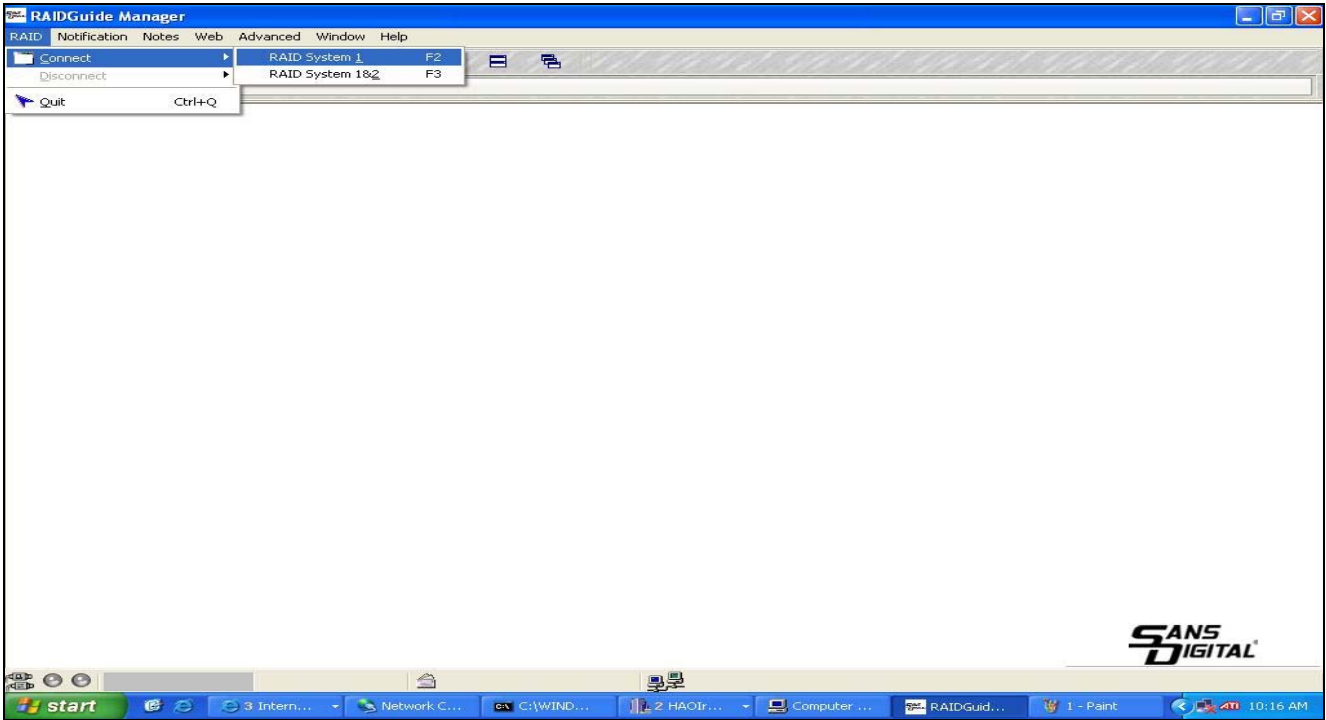


4. Choose the COM port that connects to MS2UT and click "OK".

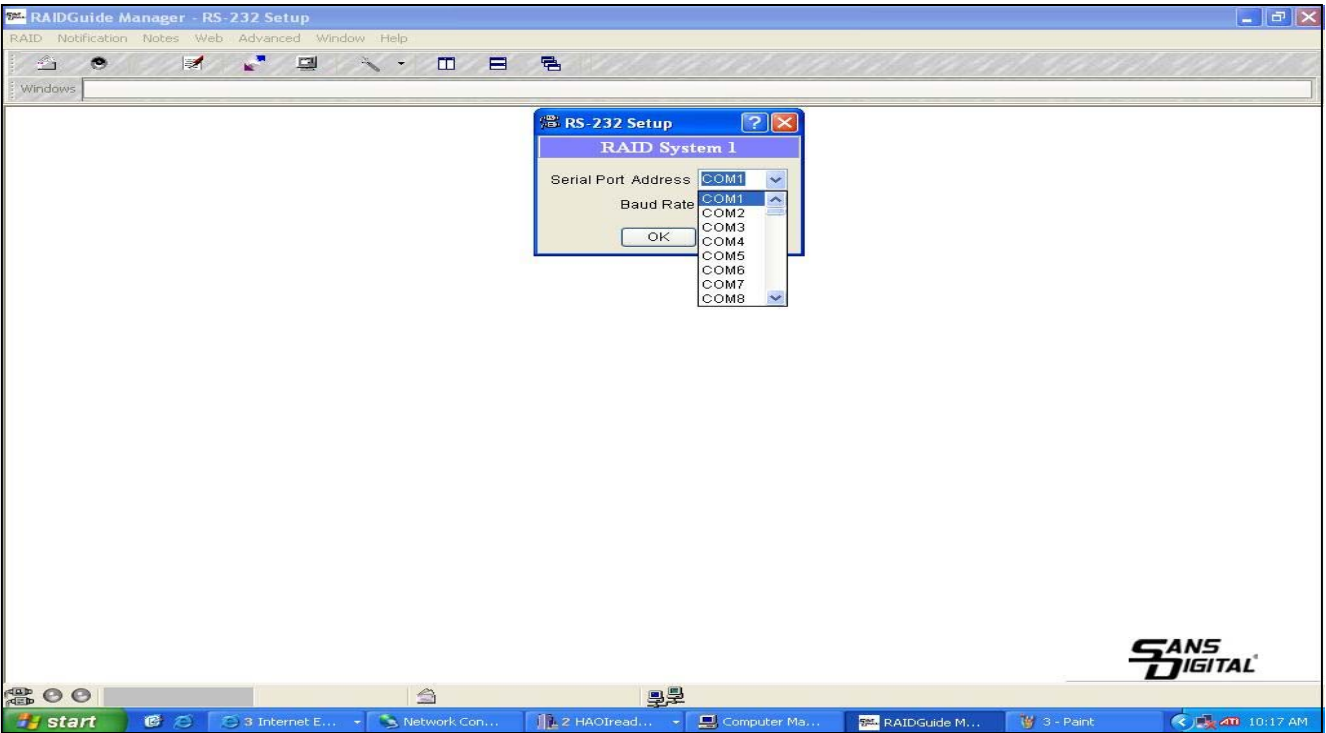


Your ONE-STOP Storage Solution Provider
www.sansdigital.com

10038 Pioneer Blvd., Santa Fe Springs, CA 90670 T: 562.949.1988 F: 562.949.3328

5. RAIDGuide manager will detect MS2UT and display the information in couple seconds.

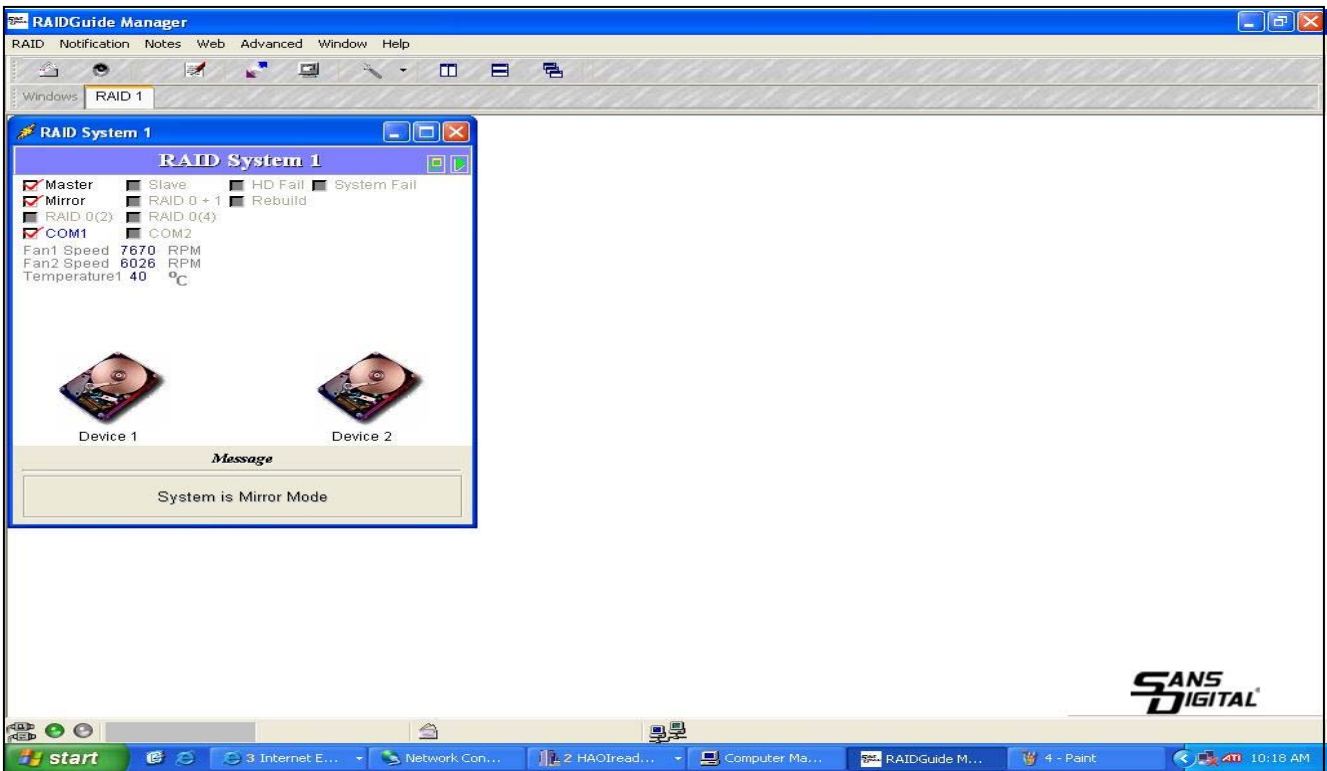


6. Click "Advanced" -> "RAID System I Setting".

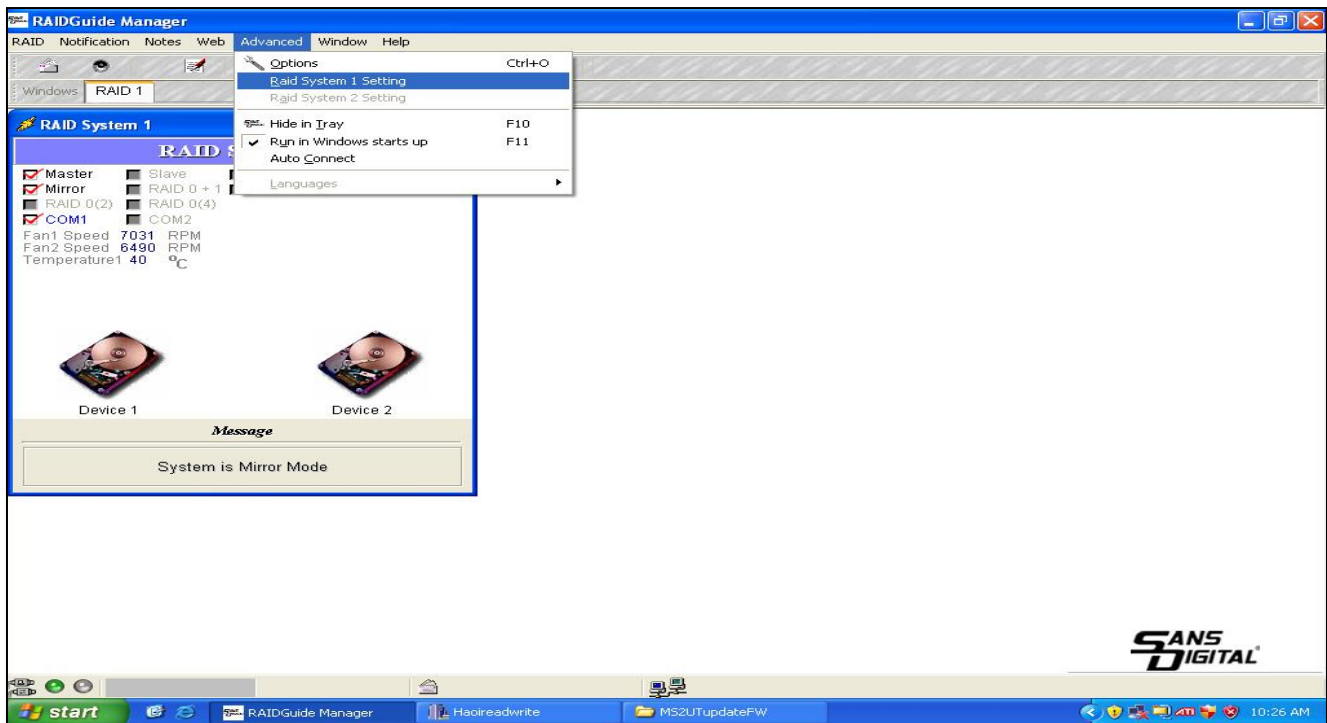


Your ONE-STOP Storage Solution Provider
www.sansdigital.com

10038 Pioneer Blvd., Santa Fe Springs, CA 90670 T: 562.949.1988 F: 562.949.3328

7. Enter your password and click “OK”. (Default password is “0000”)

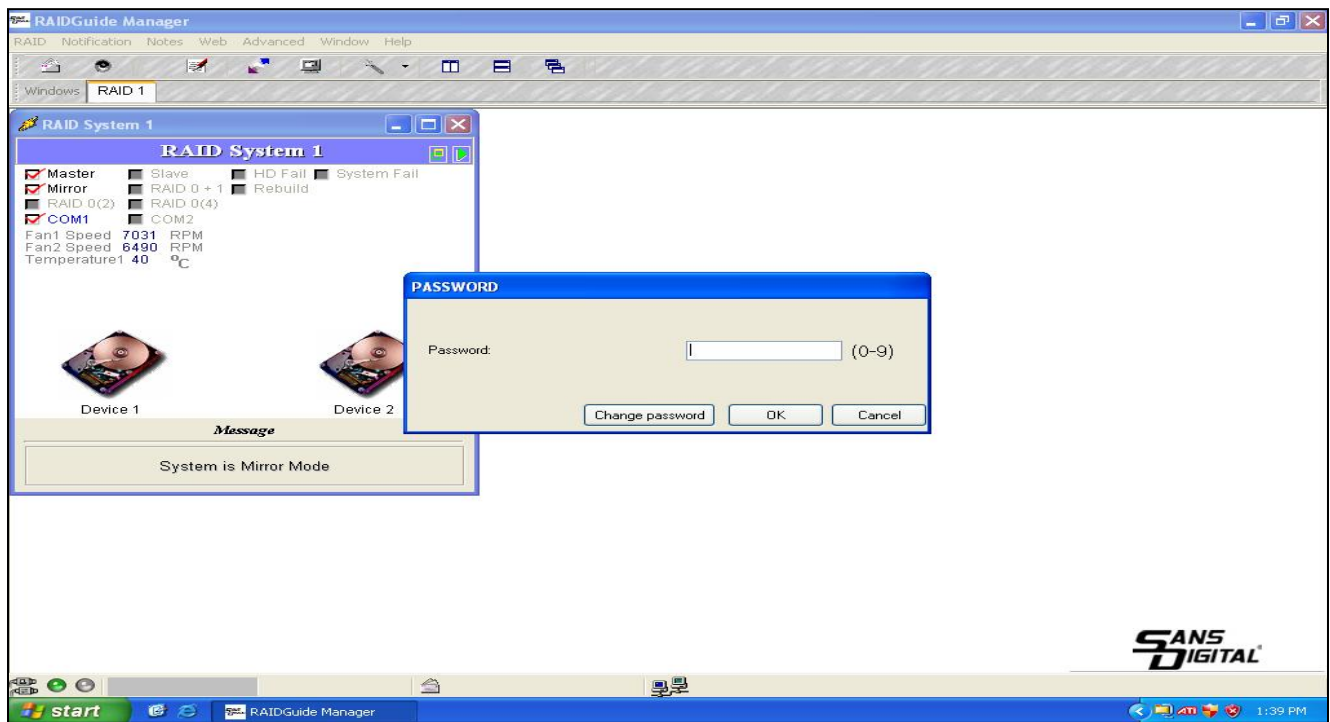


8. After the “RAID SYSTEM I Setting” page displayed, click “RS-232 UPGRADE”.

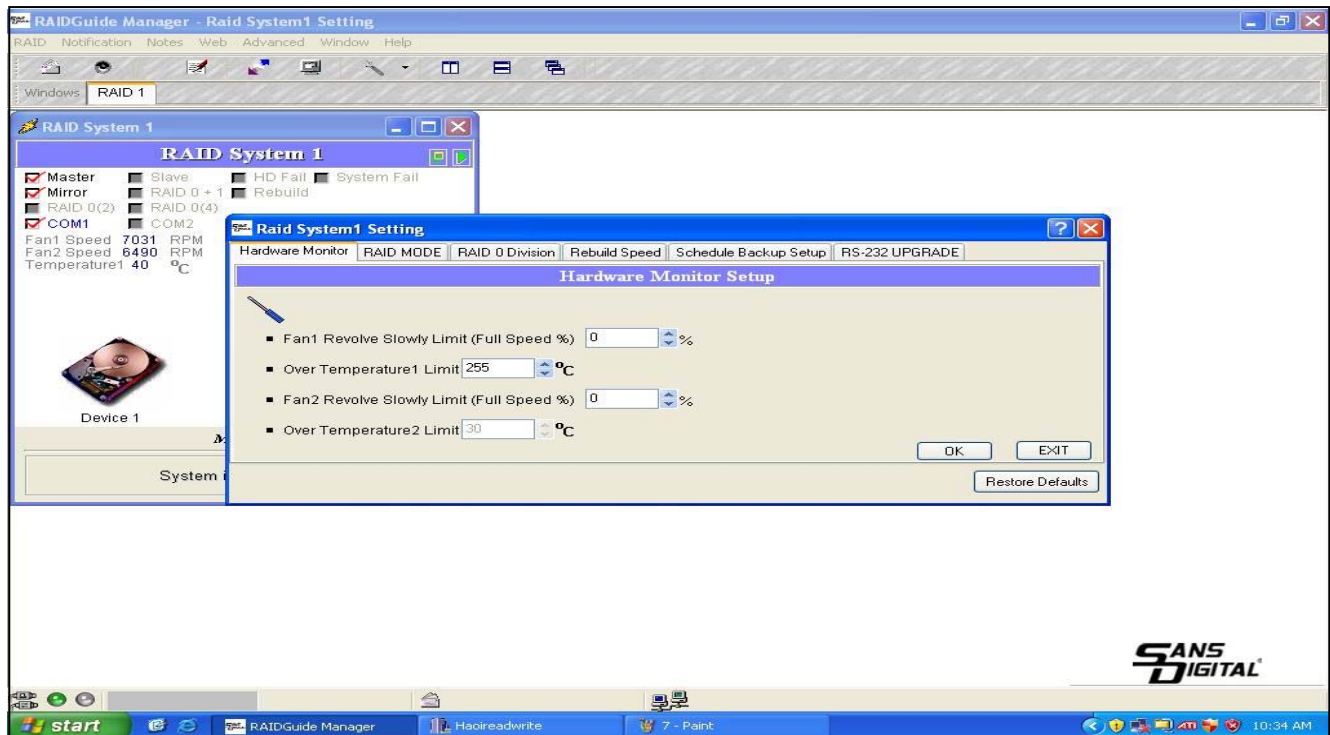


Your ONE-STOP Storage Solution Provider
www.sansdigital.com

10038 Pioneer Blvd., Santa Fe Springs, CA 90670 T: 562.949.1988 F: 562.949.3328

9. Click "OK" to confirm.

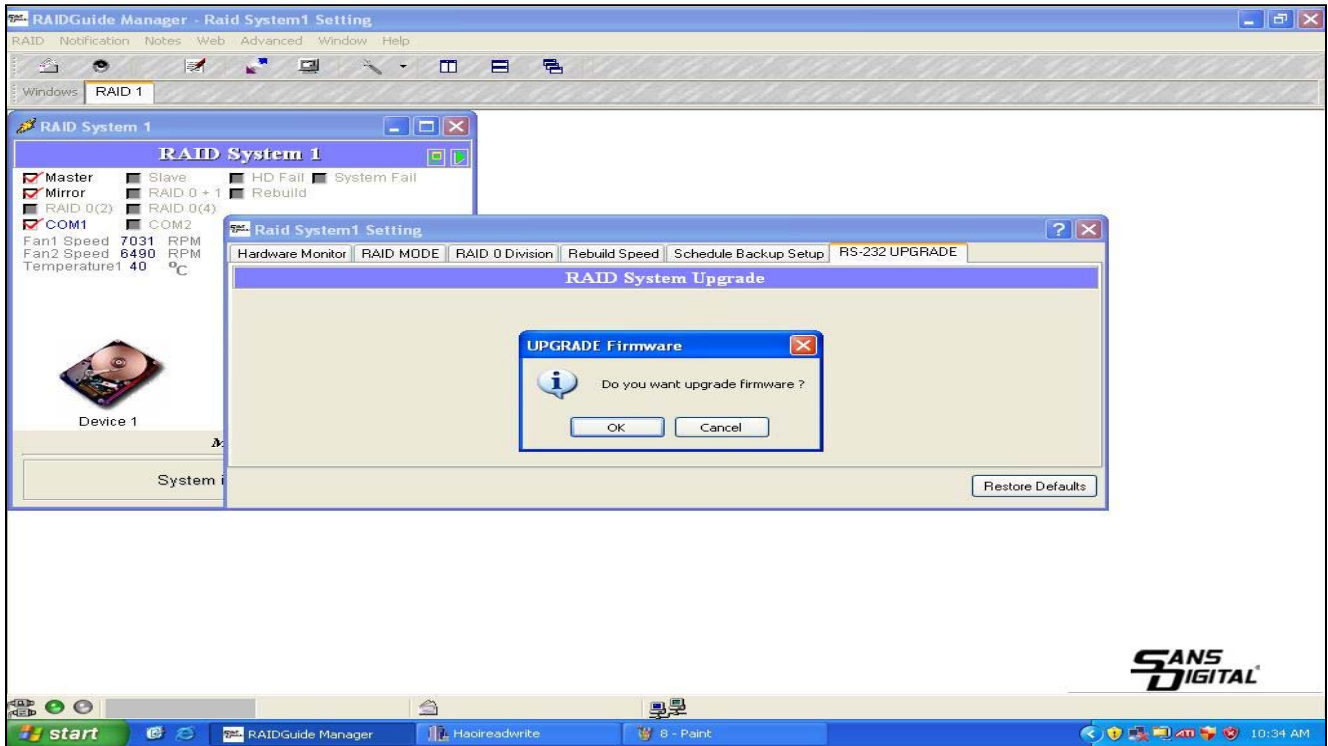


10. Click "Open Files" to select the downloaded firmware file.

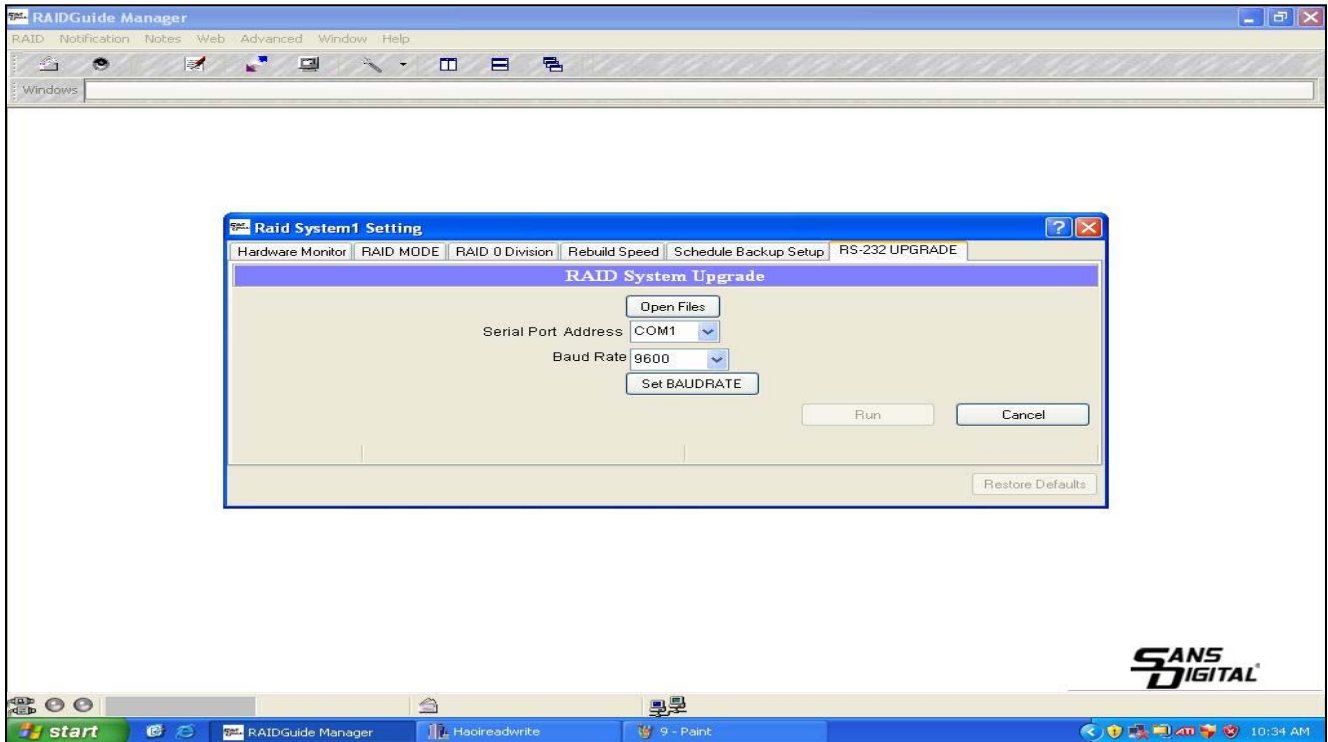


Your ONE-STOP Storage Solution Provider
www.sansdigital.com

10038 Pioneer Blvd., Santa Fe Springs, CA 90670 T: 562.949.1988 F: 562.949.3328

11. Choose the downloaded firmware file and click “Open”.

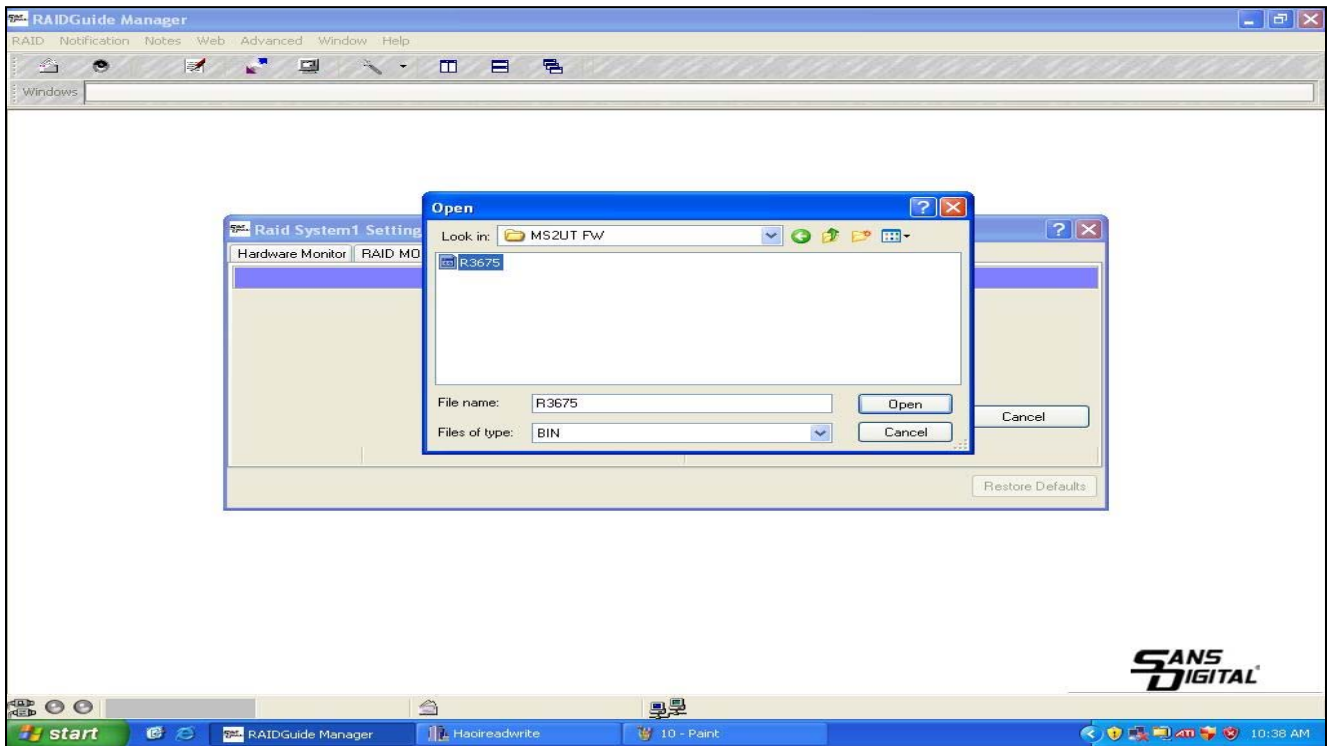


12. Click “Run” to execute the firmware update.

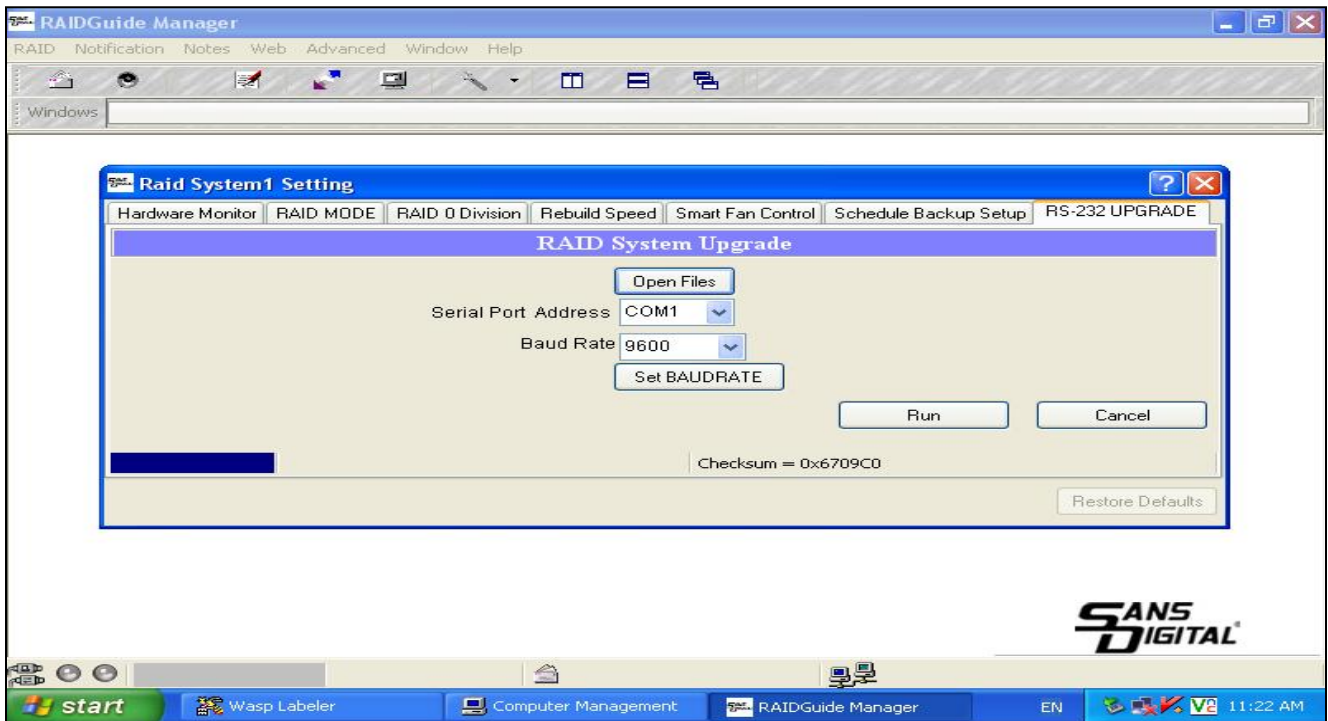

Your ONE-STOP Storage Solution Provider
www.sansdigital.com

10038 Pioneer Blvd., Santa Fe Springs, CA 90670 T: 562.949.1988 F: 562.949.3328

13. After the updating finish, click "OK" to restart system.

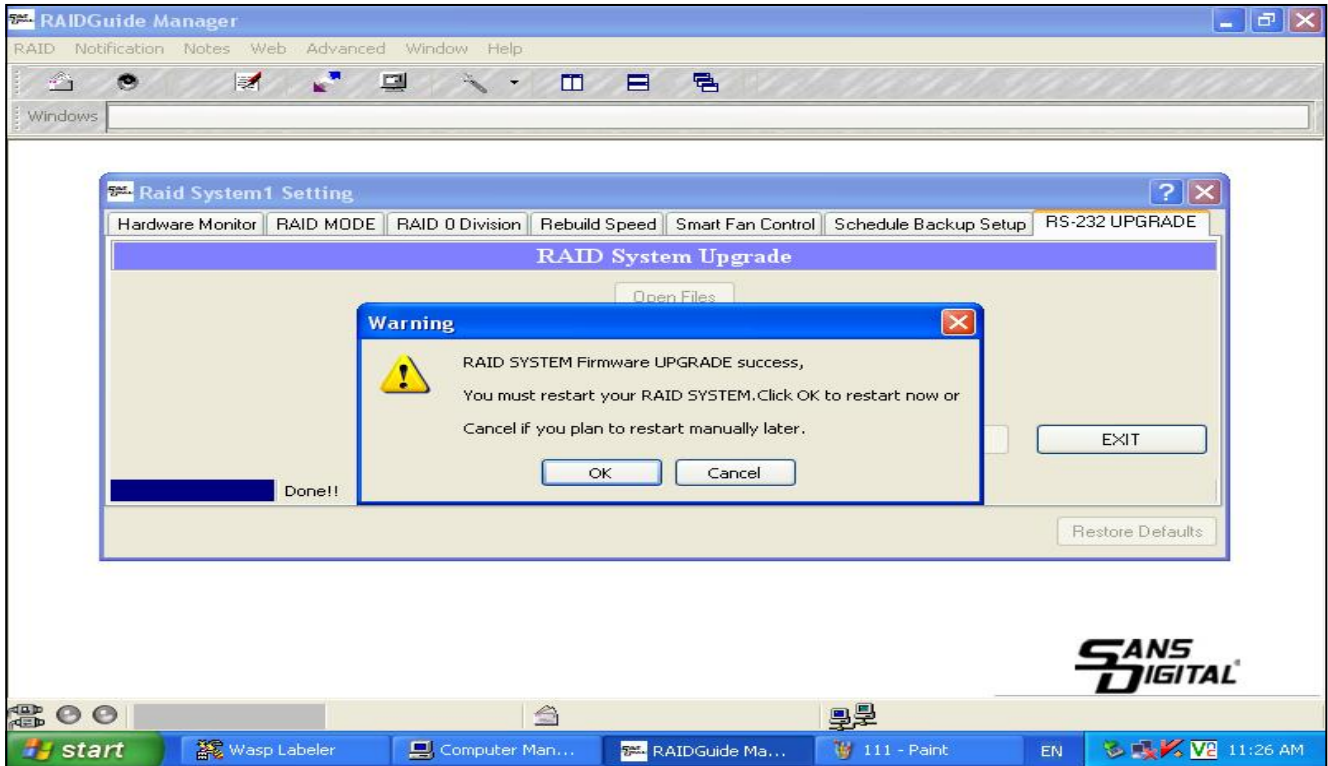

Your ONE-STOP Storage Solution Provider
www.sansdigital.com

10038 Pioneer Blvd., Santa Fe Springs, CA 90670 T: 562.949.1988 F: 562.949.3328